

### hyrax® Mini – 7

#### RPE screw

For rapid palatal expansion by means of fixed appliances.

- built-in stops prevent the screws from coming apart once maximum expansion has been obtained
- small dimensions with maximum expansion
- solder free
- break resistant retention legs, stable guidance throughout complete expansion
- the integrated spindle friction prevents unwanted turning back
- permanently laser marked arrow on the body of the screw indicates the opening direction and max. expansion
- screw can be tied down once desired expansion has been reached

With safety key.

Screw body: 9.4 mm

Maximum expansion: 7.0 mm


4 x 1/4 turn: = 0.8 mm

Material: stainless steel



Retention legs	REF	Quantity	REF	Quantity
straight	602-800-10	1 piece	602-800-30	10 pieces
bent	602-801-10	1 piece	602-801-30	10 pieces

CE 0483

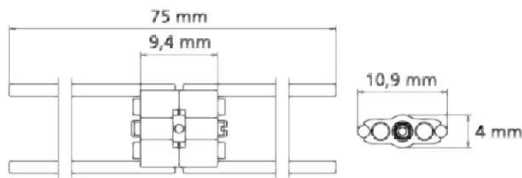

### hyrax® Medium – 10

#### RPE screw

For rapid palatal expansion by means of fixed appliances.

- built-in stops prevent the screws from coming apart once maximum expansion has been obtained
- small dimensions with maximum expansion
- solder free
- break resistant retention legs, stable guidance throughout complete expansion
- offset body for earliest possible angling of the retention legs
- the integrated spindle friction prevents unwanted turning back
- permanently laser marked arrow on the body of the screw indicates the opening direction and max. expansion
- screw can be tied down once desired expansion has been reached

With safety key.

Screw body: 12.4 mm

Maximum expansion: 10.0 mm

4 x 1/4 turn: = 0.8 mm

Material: stainless steel



Retention legs	REF	Quantity	REF	Quantity
straight	602-808-10	1 piece	602-808-30	10 pieces

CE 0483

